

TECHNICAL DATA

Model	2300
Application	Residential Side Hinged Doors
Operation	Unit opens & closes door. Door can also be used manually
Mounting	Door mount on pull side (needs 3 1/2" back clearance) - 3" above top of door needed for arm hub Jamb mount on top of push side. Avoid out swinging exterior door
Cycle time	7-8 seconds to open 7-8 seconds to close
Timed	
Hold Open	0-30 seconds
Activation	Radio 300 (MHz) or wired controls
Dimensions	12 3/4" W x 6" H x 3 1/2" D
Weight	10 lbs
Electrical	115-1-60 (9-foot power cord)
Cover	Gray ABS Plastic

FEATURES

Designed for retrofitting to most existing residential doors

Built-in radio receiver for a variety of radio controls for remote signal (a transmitter can be chair mounted)

Interfaces with electric strike (lock), ECU controls, sip and puff and others

Unique friction clutch arm provides slippage for safety

One unit fits four configurations - door mount or jamb mount as well as right hand or left hand


Built-in transformer capacity for a 24-vdc electric strike

Very cost effective and simple to install

U.S. Pat. 6,634,140 B1

New RESIDENTIAL DOOR OPENER


From Power Access Corp.

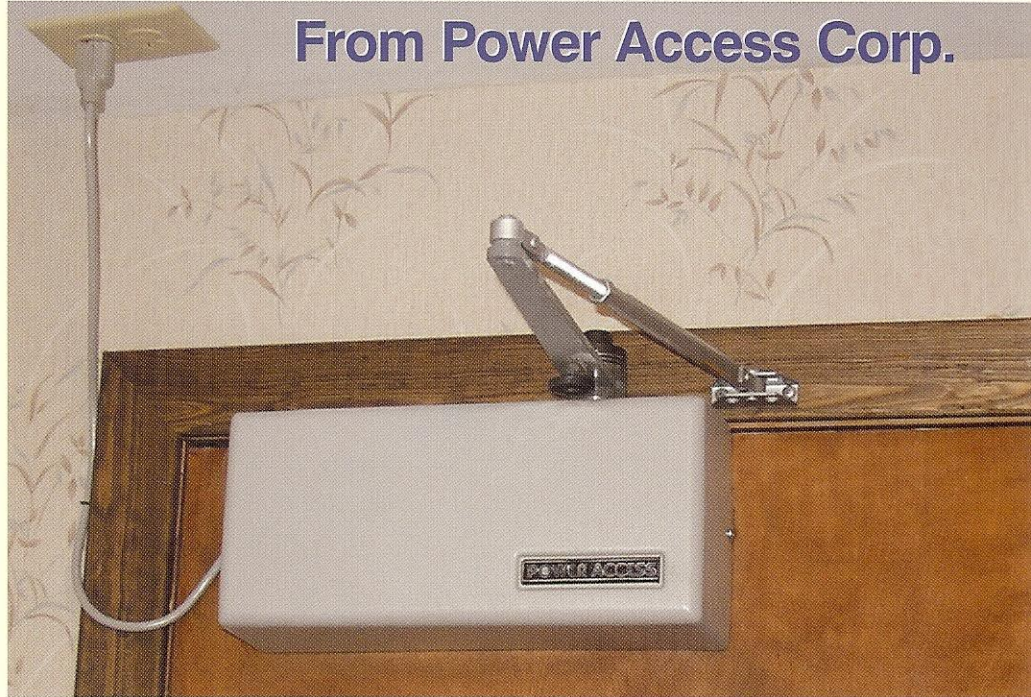

After 25 years of selling door openers for the accessibility market, **Power Access Corporation** has released a new lower cost, lighter weight slim line door opener for the home. The model 2300 is designed for the home. One unit meets a door mount application, or a jamb mount application on the push side of the door. Field changing from mode to mode or hand to hand can be done in the field in mere minutes. The door arm attaches to the door or jamb as the application requires. A unique friction clutch arm and a special gear motor allows for safe door operation in both the automatic mode and manual mode.

Cost Effective

- 1/3 LESS INSTALLED COST - ON AVERAGE - THAN CURRENT MODEL
- ARM ATTACHES TO THE DOOR OR FRAME
- 1/2 OF THE WEIGHT OF PRESENT UNIT
- LESS THAN 1/2 THE SIZE OF PRESENT UNIT
- AVAILABLE FOR DOOR MOUNT APPLICATION WITH 3 1/2" CLEARANCE REQUIRED BEHIND DOOR OR JAMB MOUNT ON PUSH SIDE OF DOOR
- ABOVE MODELS TOTALLY CONVERTIBLE IN FIELD IN LESS THAN 15 MINUTES

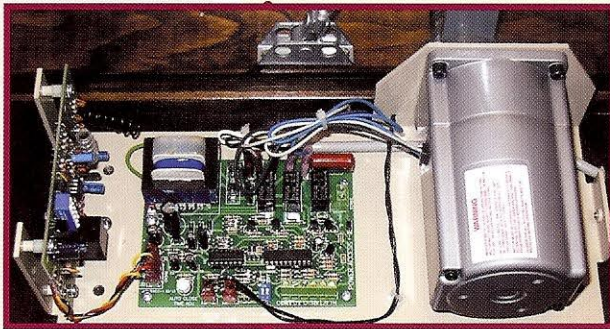

Easy Installation